


PL Oprawa LED hermetyczna / EN Airtight LED fitting / DE Hermetische LED-Leuchte / RU Герметичный светодиодный светильник / CS Hermetické LED svítidlo / SK Hermetické LED svietidlo / HU Hermetikus LED lámpatest / HR LED hermetičko rasvjetno tijelo / FR Luminaire LED hermétique / ES Luminaria LED hermética / IT Portalampada a LED impermeabile / RO Corp de iluminat LED ermetic / LT Hermetiškas LED šviestuvus / LV Hermētisks LED gaismeklis / ET Hermeetiline LED valgusti / PT Luminária LED hermética / BY Герметычны святлодыёдны свяцільнік / UA Герметичний світлодіодний світильник / BG Херметично LED осветително тяло / SL Hermetična LED-svetilka / BA LED hermetičko rasvjetno tijelo / ME LED hermetičko rasvjetno tijelo / SR LED херметичко расветно тело / MK Херметичка LED светилка / MD Corp de iluminat LED ermetic / AM Հերմետիկ լուսարդիոդային լուսատու / AZ Nava keçirməyən LED lampası / KA ჰერმეტიკული LED საბათი გარნიტური / KK Ага өткізбейтін жарықдиод фитингігі / KY Аба өткөрбөгөн жарык диоддуу жарыктандыруучу шайман / TG Тиргаки герметикии LED / TK Howa diwary LED sazlaýjysy / UZ Havo o'tkazmaydigan LED fittingi

## WELLS



Model	Power (W)	Weight (g)	Light Output (lm)	Power Factor (PF)	Color	Barcode
GT-WELLS060-18	18 W	330 g	1800 lm	>0,5	biały, white, белый, bílá, fehér	5902801464683
GT-WELLS120-36	36 W	630 g	3600 lm	>0,9		5902801464737
GT-WELLS150-48	48 W	800 g	4800 lm			5902801505270

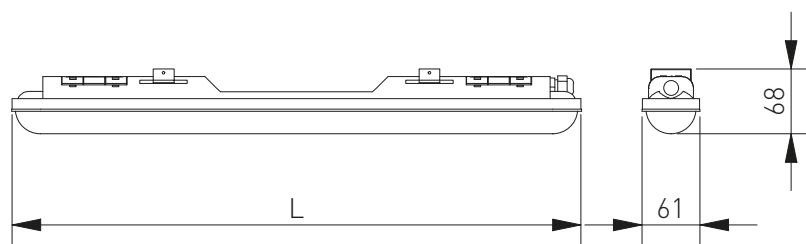

Model	Length (A)
GT-WELLS060-18	600 mm
GT-WELLS120-36	1200 mm
GT-WELLS150-48	1500 mm