


DREJE



General data:

Luminaire body:	aluminum
Mounting type:	ground foundation
Ingress protection IP:	66
Operating temperature range:	from -40° to +40°
Lifetime :	100 000h
Impact protection IK:	10

Electrical data:


Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
Protection class :	I
Connection:	wire 3x0,75mm ²
Wiring:	through
Dimming:	ON-OFF, DALI
Power supply:	inside the luminaire

Optical data:

Optical system:	lens
Material:	PMMA
Light distribution:	symmetrical, asymmetrical
Light emission:	direct

Lighting data:

Light source:	LED
Colour rendering index:	CRi>80
Tolerance of luminous flux:	+/-10%

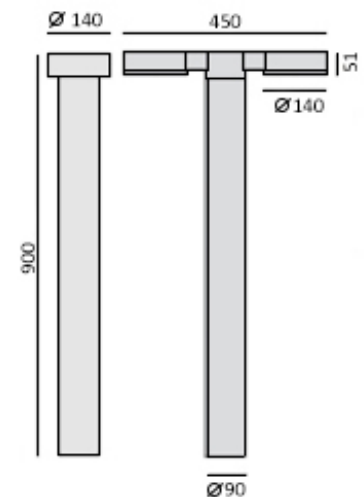

Dreje is a new generation of luminaires with an attractive design. Luminaire body made of aluminum. Ingress protection IP66, protection class I. Direct light emission. Three optics to choose from: asymmetrical, park and street. Thanks to the optics used, the luminaire is ideal for places such as parks, bicycle paths, private properties.

E- electronics

O- On- Off

D- DALI



white
03

grey
06

anthracite
70

black
05

C - colour

L - beam angle:

02 - asymmetrical

03 - street light

04 - park light

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	Light source
9355.03ELC	1053lm	18W	110lm/W	3000K	...
9355.04 ELC	1096lm	10W	110lm/W	4 000K	LED
9356.03ELC	1952lm	19W	107 lm/W	3000K	...
9356.04 ELC	2033lm	19W	107 lm/W	4 000K	...

Accessories

Foundation Type B anchor plate

no. 90.16.08

