


DREJE



General data:

Luminaire body:	aluminum
Mounting type:	ground foundation
Ingress protection IP:	66
Operating temperature range:	from -40° to +40°
lifetime :	100 000h
Impact protection IK:	10

Electrical data:


Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
Protection class :	I
Connection:	wire 3x0,75mm ²
Wiring:	through
Dimming:	ON-OFF, DALI
Power supply:	inside the luminaire

Optical data:

Optical system:	lens
Material:	PMMA
Light distribution:	symmetrical, asymmetrical
Light emission:	direct


Lighting data:

Light source:	LED
Colour rendering index:	CRi>80
Tolerance of luminous flux:	+/-10%

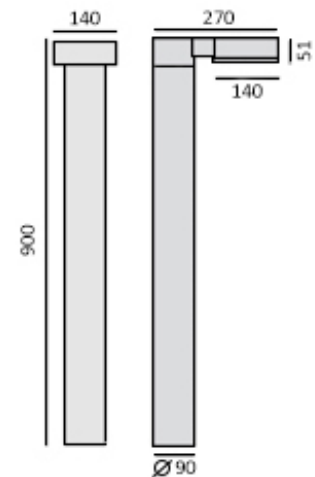

Dreje is a new generation of luminaires with an attractive design. Luminaire body made of aluminum. Ingress protection IP66, protection class I. Direct light emission. Three optics to choose from: asymmetrical, park and street. Thanks to the optics used, the luminaire is ideal for places such as parks, bicycle paths, private properties.

W - wiring
T - through
S - standard



C - colour
L - lenses to choose:
02 - asymmetric
floodlighting
distribution
03 - street lighting
distribution
04 - park lighting
distribution

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature
9353.03ELC	526lm	5W	112lm/W	3000K
9353.04 ELC	548lm	5W	110lm/W	4000K
9354.03ELC	975lm	10W	102lm/W	3000K
9354.04 ELC	1016lm	10W	102lm/W	4000K

Accessories

Foundation Type B anchor plate

no. 90.16.08

