


# K4



## General data:

luminaire body: aluminum  
 mounting type: ground foundation  
 ingress protection IP: 65  
 operating temperature range: from -20°C to +45°C  
 lifetime L80B10: 100 000 h  
 impact protection IK: 10

## Electrical data:


nominal voltage: 220-240V AC  
 Nominal frequency: 50-60Hz  
 luminaire nominal power: 13W, 25W  
 protection class: I  
 Contains light source: yes  
 dimming: On-Off, DALI  
 wiring: standard

## Optical data:


optical system: opal diffuser  
 material: glass  
 light emission: direct  
 light distribution: symmetrical

## Lighting data:

light source: LED  
 colour rendering index: CRI>80  
 tolerance of luminous flux: +/-10%  
 colour tolerance SDCM: SDCM<3

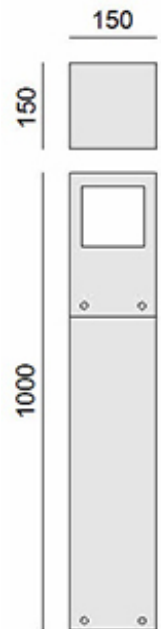

## Photometric body

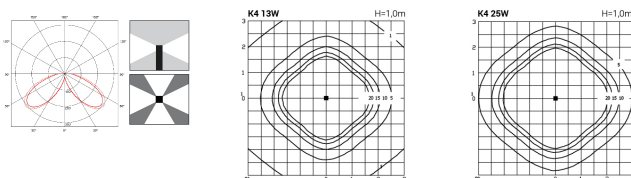

C- colour

E- electronics

O- On-Off

D- Dali



white  
03

grey  
06

anthracite  
70

black  
05

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Dimensions
9306.13EC	712lm	13W	57lm/W	3000K	≥80	4,0kg	H=1000mm
9306.14EC	742lm	13W	57lm/W	4000K	≥80	4,0kg	H=1000mm
9307.13EC	1337lm	25W	56lm/W	3000K	≥80	4,0kg	H=1000mm
9307.14EC	1393lm	25W	56lm/W	4000K	≥80	4,0kg	H=1000mm

## Accessories

Ground foundation Type A

catalogue code: 90.15 + 90.15.02



ground foundation Type B

catalogue code: 90.16.02

