


K4



General data:

luminaire body: aluminum
 mounting type: ground foundation
 ingress protection IP: 65
 operating temperature range: from -20°C to +45°C
 lifetime L80B10: 100 000 h
 impact protection IK: 10

Electrical data:


nominal voltage: 220-240V AC
 Nominal frequency: 50-60Hz
 luminaire nominal power: 13W, 25W
 protection class: I
 Contains light source: yes
 dimming: On-Off, DALI
 wiring: standard

Optical data:


optical system: opal diffuser
 material: glass
 light emission: direct
 light distribution: symmetrical

Lighting data:

light source: LED
 colour rendering index: CRI>80
 tolerance of luminous flux: +/-10%
 colour tolerance SDCM: SDCM<3

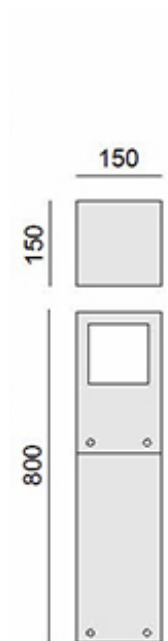

Photometric body

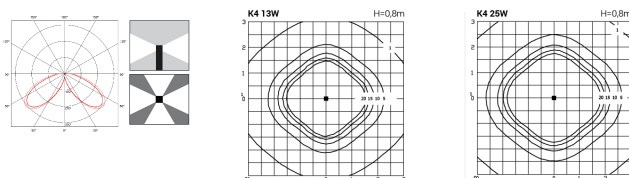

C- colour

E- electronics

O- On-Off

D- Dali



white
03

grey
06

anthracite
70

black
05

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Dimensions
9306.83EC	712lm	13W	57lm/W	3000K	≥80	6,5kg	H=800mm
9306.84EC	742lm	13W	57lm/W	4000K	≥80	6,5kg	H=800mm
9307.83EC	1337lm	25W	56lm/W	3000K	≥80	6,5kg	H=800mm
9307.84EC	1393lm	25W	56lm/W	4000K	≥80	6,5kg	H=800mm

Accessories

Ground foundation Type A

catalogue code: 90.15 + 90.15.02



ground foundation Type B

catalogue code: 90.16.02

