


KEPT



General data:

Mounting type:	to the wall
Luminaire body:	aluminum
Ingress protection:	IP66
operating temperature range:	from -40° to +45°
Lifetime L80B10:	50 000h
Impact protection:	IK10

Electrical data:


Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
luminaire nominal power:	10W
Protection class:	I
connection:	wire 3x1mm ²
Wiring:	standard
Dimming:	ON-OFF

Optical data:

Optical system:	lens
Material:	PMMA
Contains light source:	no
Lighting:	direct
Light distribution:	symmetrical


Lighting data:

Type of source:	LED
Colour rendering index:	CRI>80 (on request: CRI>90)
Colour tolerance:	SDCM<3
Tolerance of luminous flux:	+/-10%

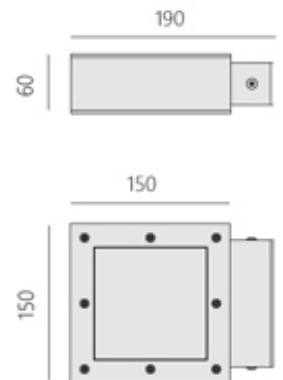

Kept is an outdoor wall lamp that glows downwards. Ideal for illuminating building facades. The use of an aperture in the form of a milky diffuser allowed to obtain an even distribution of light. Thanks to the Ingress protection IP66, the luminaire is resistant to external factors. Kept is a family of luminaires with different powers, dimensions, different types of assembly and application, while maintaining a uniform design.

C- colour



Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Dimensions	Box dimensions
9125.020CW	526lm	10W	57lm/W	2700K	≥80	2,2kg	L=190, W=150, H=56mm	250x250x150mm
9125.030CW	547lm	10W	57lm/W	3000K	≥80	2,2kg	L=190, W=150, H=56mm	250x250x150mm
9125.040CW	570lm	10W	57lm/W	4000K	≥80	2,2kg	L=190, W=150, H=56mm	250x250x150mm