


# LIGHT POLE



## General data:

luminaire body:	aluminum
mounting type:	ground foundation
ingress protection IP:	65
operating temperature range:	from -40° to +40°
lifetime L80B10 :	100 000h
impact protection IK:	06

## Electrical data:


nominal voltage:	220-240V AC
nominal frequency:	50-60Hz
luminaire nominal power:	10W
protection class:	I
wiring:	through
dimming:	ON-OFF
power supply:	inside the luminaire

## Optical data:

optical system:	opal diffuser
material:	glass
light emission:	direct
light distribution:	symmetrical


## Lighting data:

light source:	LED
colour rendering index:	CRI>80
colour tolerance SDCM:	SDCM<3
tolerance of luminous flux:	+/-10%

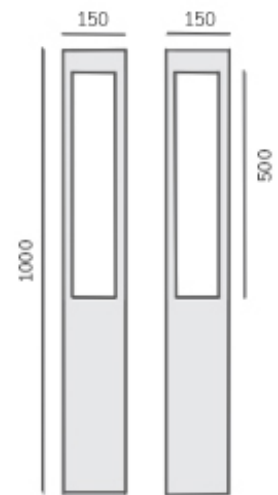


This is a range of bollards/light poles designed to maintain a uniform design. Light Pole is distinguished by an interesting, intriguing shape. Direct light allow you to create unique lighting arrangements that will perfectly emphasize the surroundings of the building. Luminaire made of aluminum. Ingress protection IP65, Impact protection IK06, protection class I

## Photometric body

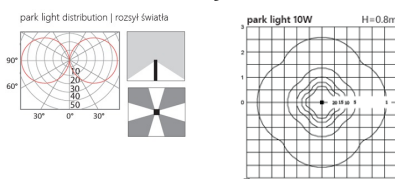

**E- electronics**  
O- On- Off  
**C - colour**



Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Box dimensions
9204.03EC	410lm	10W	43lm/W	3000K	≥80	8,0kg	170x170x1020mm
9204.04EC	428lm	10W	43lm/W	4000K	≥80	8,0kg	170x170x1020mm

## Accessories

Ground foundation Type A

no. 90.15 + 90.15.02



Foundation Type B anchor plate

no. 90.16.02

