


LTB



General data:

Luminaire body:	aluminium
Mounting type:	ground fundation
Ingress protection IP:	65
Operating temperature range:	from -40°C to +40°C
Lifetime L80B10:	100 000h
Impact protection IK:	10

Electrical data:



Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
Protection class:	I
Wiring:	through
Dimming:	ON-OFF, DALI
Power supply:	inside the luminaire

Optical data:

Optical system:	lens
Material:	PMMA
Light emission:	direct
Light distribution:	symmetrical, asymmetrical

Lighting data:

Light source:	LED
Colour rendering index:	CRI>80
Colour tolerance SDCM:	SDCM<3
Tolerance of luminous flux:	+/-10%

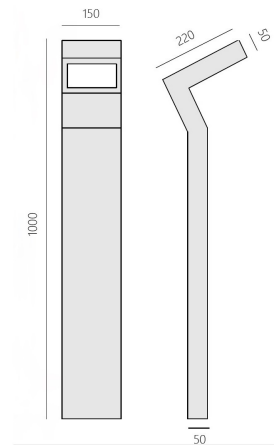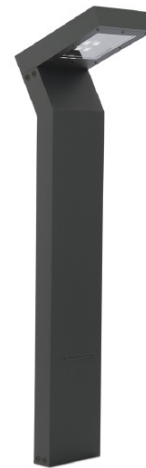

LTB is a bollard with an intriguing, irregular shape. It is an alternative for people who like unconventional solutions. In addition, thanks to the deviation of the body relative to the base and placing the LED source at such an angle, we get an interesting visual effect. Ingress protection IP65, Impact protection IK10, protection class I. Three optics to choose from: asymmetrical, park street. The luminaire will perfectly fit into both private and public spaces.

E- electronics

O- On- Off

D- DALI



white
03

grey
06

anthracite
70

black
05

C - colour

L - beam angle:

03 - street light

04 - park light

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	Weight
9359.03ELC	526lm	5W	110lm/W	3000K	6,0kg
9359.04 ELC	548lm	5W	110lm/W	4000K	6,0kg
9360.03ELC	975lm	10W	102lm/W	3000K	6,0kg
9360.04 ELC	1016lm	10W	102lm/W	4000K	6,0kg
9361.03ELC	1378lm	15W	96lm/W	3000K	6,0kg
9361.04 ELC	1436lm	15W	96lm/W	4000K	6,0kg

Accessories

Ground foundation Type A

code number: 90.15 + 90.15.01



Ground foundation type B

code number: 90.16.01

