

# LTK 500

## General data:

luminaire body:	aluminum
mounting type:	wall mounted
Ingress protection IP:	65
Operating temperature range:	from -40°C to +45°C
Lifetime L80B10:	100 000 h
impact protection IK:	10




## Electrical data:

nominal voltage:	220-240V
nominal frequency:	50-60Hz
luminaire nominal power:	17W, 33W, 67W
protection class:	I
wiring:	through
dimming:	DALI

## optical data:

optical system:	lens
material:	PMMA
light emission:	direct
light distribution:	symmetrical

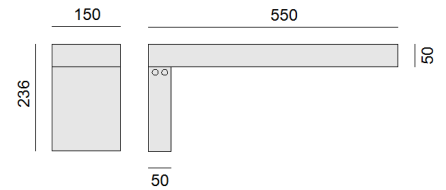

## Lighting data:

light source:	LED
colour rendering index:	>80
colour tolerance SDCM:	3SDCM
tolerance of luminous flux:	+/- 10%


## C - colour

## E-electronics

- O - on/off
- D - DALI

## L - lenses to choose:

- 02 - asymmetric floodlighting distribution
- 03 - street lighting distribution
- 04 - park lighting distribution



Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature
9326.03ELC	2103lm	17 W	129lm/W	3000K
9326.04 ELC	2190lm	17 W	129lm/W	4 000K
9327.03ELC	3898lm	33W	123lm/W	3000K
9327.04 ELC	4 061lm	33W	123lm/W	4 000K
9328.03ELC	7797lm	67 W	121lm/W	3000K
9328.04 ELC	8122lm	67 W	121lm/W	4 000K