


# SQ



## General data:

Luminaire body:	aluminium
Mounting type:	ground foundation
Ingress protection IP:	65
Operating temperature range:	from -40°C to +40°C
Lifetime L80B10:	100 000h
Impact protection IK:	10

## Electrical data:


Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
Protection class:	I
Wiring:	through
Dimming:	ON-OFF, DALI
Power supply:	inside the luminaire

## Optical data:

Optical system:	lens
Material:	PMMA
Light emission:	direct
Light distribution:	symmetrical


## Lighting data:

Light source:	LED
Colour rendering index:	CRI>80
Colour tolerance SDCM:	SDCM<3
Tolerance of luminous flux:	+/-10%

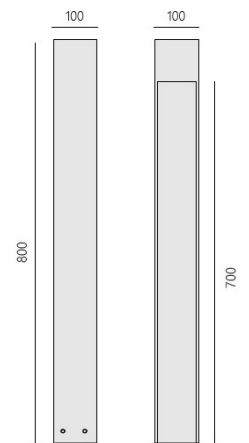

The SQ lighting bollard is an unusual combination of modern elegance and functionality. Its simple, geometric shape makes it not only a source of light, but also a unique design element of the outdoor space. The modern form of this post not only meets lighting requirements, but also creates a unique visual comfort. The emitted light gives the space a warm and cozy atmosphere, ideal for relaxing or socializing.

## Photometric body



Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	Weight
9365.03EC	169lm	7W	26lm/W	3000K	4,4 kg
9365.04EC	179lm	7W	26lm/W	4000K	4,4 kg
9366.03EC	277lm	13W	23lm/W	3000K	4,4 kg
9366.04EC	294lm	13W	96lm/W	4000K	4,4 kg

## Accessories

Ground foundation type B

code number: 90.16.07

