

# WES



## General data:

Luminaire body:	aluminum
Mounting type:	ground foundation
Ingress protection:	IP66
operating temperature range:	from -40° to +40°
Lifetime L80B10:	100 000h
Impact protection:	IK10

## Electrical data:



Nominal voltage:	220-240V AC
nominal frequency:	50-60Hz
luminaire nominal power:	7W
Protection class:	I
Dimming:	on-off, DALI
Wiring:	through

## Optical data:

Optical system:	lens
Material:	PMMA
Contains light source:	yes
Light emission:	direct
Light distribution:	symmetrical, asymmetrical

## Lighting data:


Type of source:	LED
Colour rendering index:	CRI>80
colour tolerance SDCM:	SDCM<3
Tolerance of luminous flux:	+/-10%

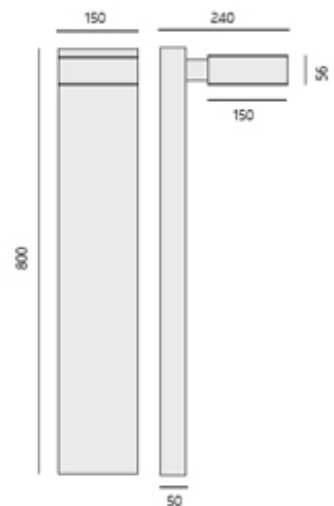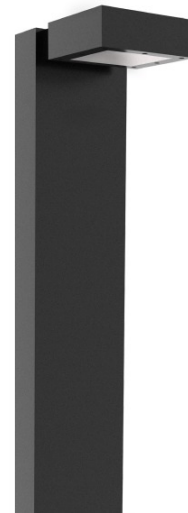


WES is a family of luminaires for installation: ceiling, wall mounted and installation to the ground in the form of an outdoor bollards and a light pole. The Wes family of luminaires will allow you to maintain a uniform design in a given project and maintain the harmony of illuminated illumination of the building and the areas around it. The Wes post has three optics to choose from: asymmetrical, park street. Ingress protection IP66, Impact protection IK10, protection class I. Luminaires for lighting passageways, open spaces and driveways.

## Photometric body


asymmetrical light distribution | rozsył światła




street light distribution | rozsył światła




park light distribution | rozsył światła




asymmetrical 7W H=0.8m



street light 7W H=0.8m



park light 7W H=0.8m



**E- electronics**

O- On- Off

D- DALI


**C - colour**

**L - beam angle:**

O2 - asymmetrical

O3 - street light

O4 - park light



Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Box dimensions
9193.03ELC	384lm	7W	59lm/W	3000K	≥80	5,5kg	260x170x820mm
9193.04ELC	400lm	7W	59lm/W	4000K	≥80	5,5kg	260x170x820mm

**Accessories**

Ground foundation Type A

catalogue code 90.15 + 90.15.01



ground foundation Type B

catalogue code 90.16.01

