

Recessed ceiling SIGMA Dali LED SMD 25W 3396lm(2856lm) CRI90 4000K 48° Grey White

indeluž

The SIGMA family is the discretion and slenderness LED luminaire made with a section of only 32x44 mm and two lengths to efficiently illuminate a work surface, a counter hotel, an office desk. This range has been manufactured from shaped ceiling lamps and recessed version. The SIGMA lights have a possibility of regulation that make them ideal for environments such as homes, catering or hospitality environments.

### GENERAL DATA

|                    |                         |
|--------------------|-------------------------|
| Category           | Recessed                |
| Family             | Sigma                   |
| Finish             | [03] Grey/[01] White    |
| Location           | Indoor                  |
| Installation       | Ceiling                 |
| Body material      | Aluminum, Polycarbonate |
| Frame material     | Aluminum                |
| Reflector material | Metallic ABS            |
| ETIM class         | EC000282                |
| EAN                | 8433264603212           |

### LIGHT SOURCES



|                    |           |
|--------------------|-----------|
| LED SMD            |           |
| Luminous flux      | 3396lm    |
| Total flux         | 2856lm    |
| Light source power | 25 W      |
| Color temperature  | 4000K     |
| CRI                | 90        |
| Color consistency  | 3 SDCM    |
| Energy efficiency  | E (4000K) |

### LIGHT BEAMS

|      |                        |
|------|------------------------|
| Beam | 48° - Direct symmetric |
|------|------------------------|

### TECHNICAL DATA

|                                 |   |
|---------------------------------|---|
| Dimensions                      | Height x Width x Length (mm): 42 x 42 x 650 |
| IP                              | IP20  |
| Protection class                | Class II                                    |
| Frequency                       | 50/60 Hz                                    |
| Dimmable                        | Dali  |
| Input voltage                   | 220-240V AC V                               |
| Output current                  | 700 mA                                      |
| Power factor                    | 0.95  |
| Auxiliary gear                  | Electronic                                  |
| Alternative auxiliary equipment | I-10V CONV.JUS110P SIGMA + 60€ PVP          |
| UGR                             | 19  |
| Lifetime                        | 60,000 h                                    |
| LED lifetime L                  | 80  |
| LED lifetime B                  | 20  |
| Weight                          | 0.69 Kg                                     |
| Cut hole dimensions             | Length x Width x Depth (mm): 643 x 34 x 42  |
| ECORAE category I               | LED-A                                       |

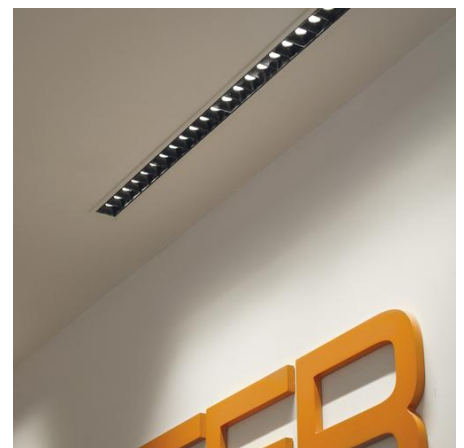

# SIGMA

809E-L4025B4D-03-01



Recessed ceiling SIGMA Dali LED SMD 25W 3396lm(2856lm) CRI90 4000K 48° Grey White

indeluž

